



Rec'd PCT/PTO 03 SEP 2004

10/506845



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP1 9BQ

REC'D 3 APR 2003

WIPO

PCT

# **PRIORITY DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


*He Behan*

Dated 27 March 2003

**BEST AVAILABLE COPY**

Patents Form 1/77

Patents Act 1977  
(Rule 16)

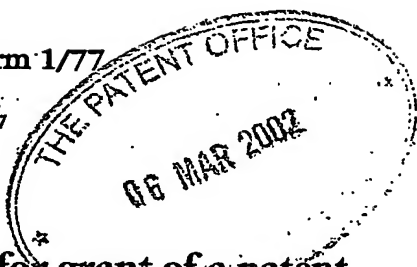

02 E701272-4 D02224  
P01/7700 0.00-0205267.8

1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

WBH

2. Patent application number

(The Patent Office will fill in this part)

0205267.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NP AEROSPACE LIMITED  
473 FOLESHILL ROAD,  
COVENTRY  
CV6 5AQ

Patents ADP number (if you know it)

7662000001

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

4. Title of the invention

METHOD OF MAKING A HELMET

5. Name of your agent (if you have one)

J.Y. & G.W. JOHNSON

“Address for service” in the United Kingdom to which all correspondence should be sent (including the postcode)

KINGSBOURNE HOUSE,  
229-231 HIGH HOLBORN,  
LONDON WC1V 7DP

Patents ADP number (if you know it)

976001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer ‘Yes’ if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s) 2

Abstract

Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*WGH Johnson*

Date 6.3.02

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr William Hanson  
020 7405 0356

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

# METHOD OF MAKING A HELMET

## Background to the Invention

5 This invention relates to a method of making a ballistic protective helmet and to a helmet made by the method.

10 Composite helmets have conventionally been made from strong fabric impregnated with a phenolic resin and cut into a hexagonal or octagonal shape called a pinwheel. Straight radial cuts are made such that the pinwheel comprises a crown from which radiates a plurality of straight-edged petals. A number of pinwheels are superposed by placing the crowns of the pinwheels on top of one another so that their petals are in a staggered relationship. The preform which results is placed in a heated mold, comprising matched steel dies, in a compression press and is subjected to heat and pressure to form the helmet.

15 In making the pinwheels, much fabric is cut to waste. This is a very significant disadvantage in view of the fact that the preferred fabrics comprise aramid fibers, such as "Kevlar" ® sold by DuPont, and are expensive. At present there is also a world shortage, particularly of the higher grades (i.e. the strongest) aramid fibers.

20 The speed of the cutting procedure described above is limited by the fact that many cuts have to be made in different directions.

## Summary of the Invention

25 With the aim of significantly reducing waste relative to the conventional method and at the same time producing a stronger helmet, the present invention provides a method of making a helmet comprising the steps of cutting a plurality of substantially rectangular blanks from a sheet of fabric, making cuts in each blank to form a crown portion and lobe portions therefrom, arranging a stack of said sheets into a helmet preform such that the lobe portions of any blank partially overlap adjacent lobe portions of the same  
30 blank, and molding the helmet from the preform.

Rectangular blanks tessellate, thus wasting no material at all in the cutting steps, and speeding up the cutting steps as compared with the known blanks. Starting from a sheet of material with a straight edge, only three cuts are required to form four square blanks.

5

Preferably, the method includes the use of fabric previously impregnated with resin, preferably phenolic resin. We prefer to use fabric to which the resin has been added as an adhesive film. Alternatively, the resin could be added during the molding step.

- 10 Most preferably, the rectangular blanks are substantially square. The cutting process can be speeded up even further by forming only one cut extending inwardly from each side of each blank, thus forming only four lobe portions from the blank.

15 Preferably, the cuts in the blank are curved. In particular, the cuts preferably start at a position on each side of the blank which divides the side into two fractions of between 0.3/0.7 and 0.45/0.55. Each cut then preferably follows an arc of a circle towards that other side of the blank to which the cut is already closest. The cuts preferably do not extend further than any perpendicular bisector of any side of the blank: in a particular embodiment, the cuts terminate at the first perpendicular bisector reached.

20

We have discovered that by forming such curved cuts, the arranging step, which preferably comprises pushing the stack of blanks into a substantially hemispherical cavity, requires very little force as the lobe portions of each blank close up and partially overlap somewhat like the iris of a camera.

25

Preferably, the centers of the blanks in the stack are aligned and there is an angular offset between adjacent blanks. The invention makes it possible to use fewer blanks than the prior art process. Advantageously, the blanks are of more than one size, smaller blanks providing additional layers in the crown region of the helmet.

30

The blanks may have a thickness between 0.3 and 1 mm.

Preferably, the molding step involves the application of heat as well as pressure. This causes a flow of some of the resin down towards the rim of the helmet. However, the curved cuts divert the flow of resin to a horizontal direction around the helmet and the final distribution of resin is more even than in prior art helmets.

5

Preferably, the molded helmet is trimmed in order to form a helmet with a rim that lies substantially in one plane.

The invention also provides a helmet formed from a stack of fibrous blanks  
10 impregnated with resin, each blank comprising a trimmed rectangle and each blank having four curved cuts extending inwardly, one from each side of the rectangle.

#### Brief Description of the Drawings

In order that the invention may be more readily understood, reference will now be  
15 made, by way of example only, to the accompanying drawings, in which:

Figure 1 shows a large cut blank for use in making a helmet according to an embodiment of the invention; and

20 Figure 2 shows a small cut blank for use in making the same helmet.

#### Detailed Description of the Preferred Embodiments

Figure 1 shows a square blank of side 0.5 m cut from a strong woven fabric that has been impregnated with phenolic resin. Positions on the blank will be considered as  
25 Cartesian coordinates, with the bottom left-hand corner of the blank at the origin and the length of each side being one unit. Four cuts 1 are formed, starting from the points (0.375, 0), (1, 0.375), (0.625, 1) and (0, 0.625). The cuts are arcs of circles centered about the points (0.6875, 0.25), (0.75, 0.6875), (0.3125, 0.75) and (0.25, 0.3125) respectively. The cuts terminate at the points (0.375, 0.5), (0.5, 0.375), (0.625, 0.5) and  
30 (0.5, 0.625) respectively, i.e. at the first perpendicular bisector of any side of the blank reached (shown dotted).

This divides the blank into four lobe portions 3 and a crown portion 5.

Figure 2 shows a square blank of side 0.25 m, in which four cuts are made, similar to those of the blank of Figure 1 but shorter.

5 A stack of blanks alternating between the blanks of Figure 1 and those of Figure 2, for example comprising five or seven of each type, is arranged in a stack with the centers of the blanks aligned. Each subsequent blank of the same type is rotated by a predetermined angle with respect to the previous blank. The predetermined angle should not be close to  $90^\circ$  or  $180^\circ$ . For evenness of material it is preferred that the product of the predetermined angle and the number of blanks of a given type in the  
10 stack is approximately  $360^\circ$  or a multiple of  $360^\circ$ . In a particular example, each blank is rotated by  $55^\circ$  with respect to the previous blank.

In order to form a generally hemispherical helmet preform, the stack of blanks is pushed into a concave cavity having a part-spherical surface. In doing so, the lobe  
15 portions 3 ride over the adjacent lobe portions of the same blank. This is achieved with remarkably little pushing force. The smaller blanks of Figure 2 provide additional layers at the crown portion of the preform, whilst the overlapping lobe portions 3 of the larger blanks of Figure 1 provide additional layers nearer the rim of the preform.

20 The helmet preform is preheated and then taken to a mold comprising a convex lower molding tool and a concave upper molding tool and is formed into a desired helmet shape by pressing the tools together and heating to a temperature of approximately  $140^\circ\text{C}$  for about 15 minutes. The curved cuts 1 in each blank cause the resin to flow around the helmet horizontally thus giving a sufficiently even final distribution of resin.

25 It will be appreciated that the square shape of the blanks causes unwanted triangular portions thereof to project from the side of the helmet. However, the unwanted portions are remarkably small and can easily be trimmed from the helmet after molding. Subsequently, the helmet has holes drilled therein and is painted and fitted  
30 with a cradle.

The resistance to impact of helmets according to the invention is more predictable than prior art helmets, because the amount by which adjacent lobes overlap is predictable.

The V50 value, that is the velocity of projectiles stopped 50% of the time, by the helmet, is higher than prior art helmets at the same given weight.

5 Whilst the figures show two particular embodiments of resin-impregnated blanks, it should be understood that different configurations also fall within the scope of the appended claims. In particular, the size of the crown portion 5 of the blank can be made smaller, for a taller, narrower helmet, or larger, for a wider, shallower helmet. In one example, as well as the blanks shown in Figures 1 and 2, further square blanks of side 0.2 m are also used and the blanks are stacked in a sequence comprising one blank  
10 of each of the three sizes, which sequence is repeated several times. Four or more differently sized blanks could alternatively be used in making a helmet according to the invention.



CLAIMS

1. A method of making a helmet comprising the steps of cutting a plurality of substantially rectangular blanks from a sheet of fabric, making cuts in each blank to  
5 form a crown portion and lobe portions therefrom, arranging a stack of said sheets into a helmet preform such that the lobe portions of any blank partially overlap adjacent lobe portions of the same blank, and molding the helmet from the preform.
2. A method according to claim 1, wherein the sheet of fabric has previously been  
10 impregnated with resin.
3. A method according to claim 2, wherein the resin is phenolic resin.
4. A method according to claim 1, 2 or 3, wherein the rectangular blanks are  
15 substantially square.
5. A method according to any preceding claim, wherein the step of making cuts comprises forming only one cut extending inwardly from each side of each blank, thus forming only four lobe portions from the blank.  
20
6. A method according to any preceding claim, wherein the cuts in each blank are curved.
7. A method according to any preceding claim, wherein the cuts start at a position  
25 on each side of the blank which divides the side into two fractions of between 0.3/0.7 and 0.45/0.55.
8. A method according to claim 7, wherein each cut then follows an arc of a circle towards that other side of the blank to which the cut is already closest.  
30
9. A method according to claim 8, wherein the cuts do not extend further than any perpendicular bisector of any side of the blank.

10. A method according to claim 9, wherein each cut terminates at the first perpendicular bisector reached.
11. A method according to any preceding claim, wherein the arranging step  
5 comprises pushing the stack of blanks into a substantially hemispherical cavity.
12. A method according to any preceding claim, wherein the centers of the blanks in the stack are aligned and there is an angular offset between adjacent blanks.
- 10 13. A method according to any preceding claim, wherein the blanks are of more than one size.
14. A method according to any preceding claim, wherein the blanks have a thickness between 0.3 and 1 mm.
- 15 15. A method according to any preceding claim, wherein the molding step involves the application of heat as well as pressure.
16. A method according to any preceding claim, wherein the molded helmet is  
20 trimmed in order to form a helmet with a rim that lies substantially in one plane.
17. A helmet formed from a stack of fibrous blanks impregnated with resin, each blank comprising a trimmed rectangle and each blank having four curved cuts extending inwardly, one from each side of the rectangle.

1/2

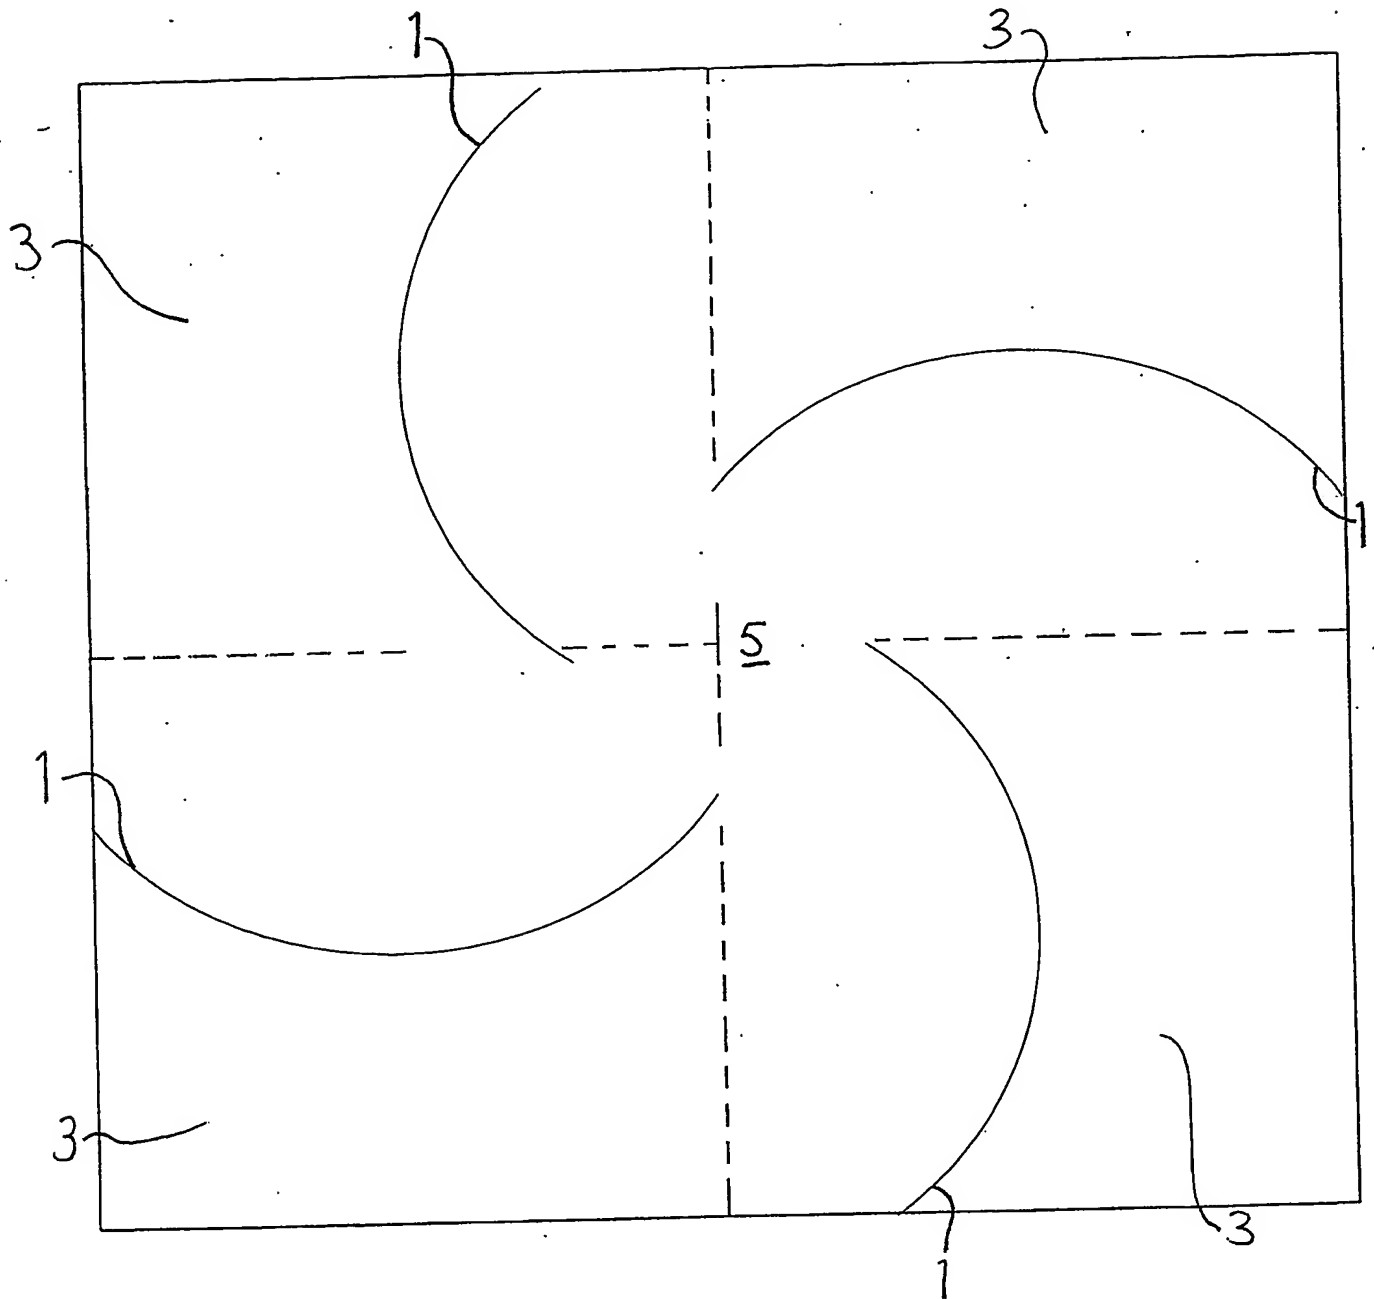


Fig.1

2/2

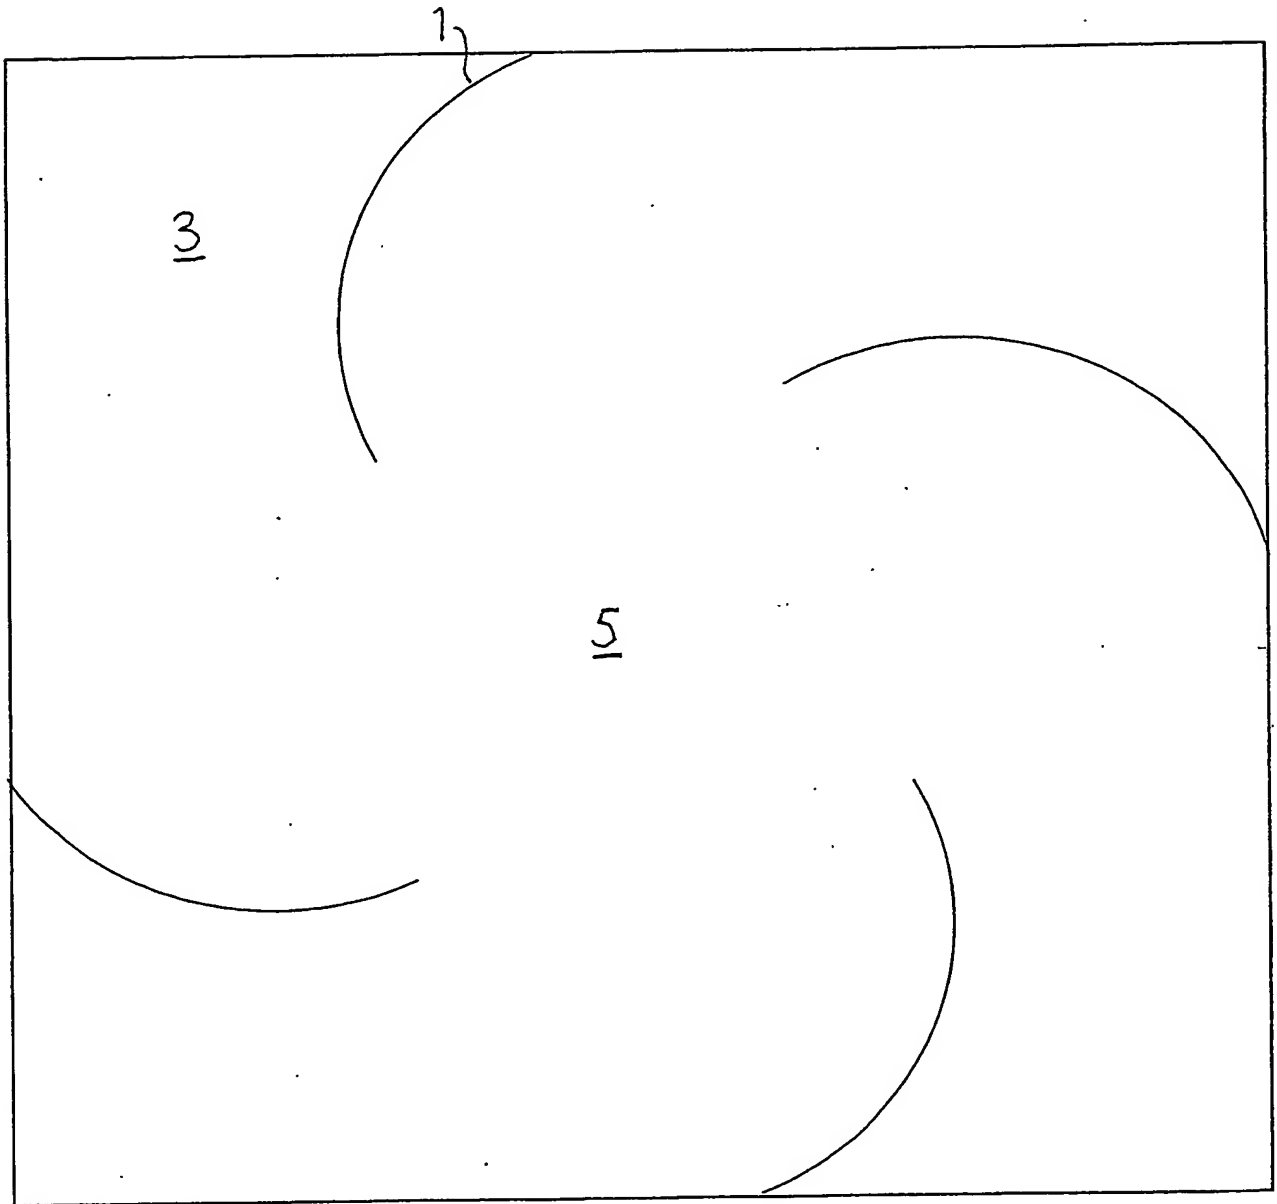


Fig. 2

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**